



European Radiocommunications Committee (ERC)
within the European Conference of Postal and Telecommunications Administrations (CEPT)

ERC RECOMMENDATION (01)02 (revised Rottach Egern, February 2010)

**PREFERRED CHANNEL ARRANGEMENTS FOR FIXED SERVICE SYSTEMS
OPERATING IN THE FREQUENCY BAND 31.8 – 33.4 GHz**

Recommendation adopted by the Working Group "Spectrum Engineering" (SE)

INTRODUCTION

This ERC Recommendation provides a channel arrangement on a purely technical basis for the development of fixed service equipment. Like the channel arrangements for the 26 GHz and 28 GHz bands this recommendation it is **not** aimed to give any preference with regard to what kind of technologies (e.g. FDD or TDD) or applications (e.g. fixed wireless access (FWA) or infrastructure) to be accommodated in this band.

Furthermore, this ERC Recommendation does **not** provide any guidance on frequency assignment issues (e.g. block assignment, measures to ensure inter-operator-compatibility, symmetrical and asymmetrical traffic etc.).

“The European conference of Postal and Telecommunications Administrations,

considering

- a) that the WRC-2000 allocated on a world-wide primary basis the 31.8 - 33.4 GHz band to the Fixed Service, available for high density applications in the fixed service (HDFS) (Art 5.547);
- b) that sharing in the 31.8 - 33.4 GHz band with radionavigation (RNS), space research (SRS) (Deep Space-space-to-Earth) and inter-satellite services (ISS) is considered as feasible taking into account footnote 5.547A stating that administrations should take practical measures to minimize the potential interference between stations in the fixed service and airborne stations in the radionavigation service in the 31.8 - 33.4 GHz band, taking into account the operational needs of the RNS;
- c) that CEPT has a long term objective to harmonise the use of frequencies throughout Europe to benefit from technical and economic advantages;
- d) that CEPT administrations should apply preferred channel arrangement in order to make the most effective and efficient use of the spectrum for fixed service applications;
- e) that it may sometimes be desirable to interleave additional radio-frequency channels between those of the main pattern;
- f) that technical and operational restrictions may be necessary to minimise potential interference between stations in the fixed service and airborne stations in the radionavigation service.

recommends

1. that CEPT administrations should follow the recommended preferred channel arrangement for the frequency band 31.8 - 33.4 GHz given in the Annex;
2. that when an interleaved channel arrangement is used, the values of the centre frequencies of these radio-frequency channels should be below those of the corresponding channel frequencies (as detailed in the Annex) by a value of half the channel spacing;
3. that in the case of deployment of point to multipoint systems with frequency duplex division (FDD) the upper subband should be used for the transmission from the terminals to the central station and the lower for the transmission from the central station to the terminals.”

Note:

Please check the Office web site (www.ero.dk) for the up to date position on the implementation of this and other ECC and ERC Recommendations.

Annex

PREFERRED CHANNEL ARRANGEMENT IN THE BAND 31.8 – 33.4 GHz

The centre frequencies for channel separations of 3.5 MHz, 7 MHz, 14 MHz, 28 MHz, 56 MHz and 112 MHz shall be derived as follows:

Let

f_r be the reference frequency of 32599 MHz,

f_n be the centre frequency (MHz) of the radio-frequency channel in the lower half of the band,

f_n' be the centre frequency (MHz) of the radio-frequency channel in the upper half of the band,

Duplex spacing = 812 MHz,

Centre gap = 56 MHz for the 3.5, 7, 14 and 28 MHz channel separations,
140 MHz for the 56 and 112 MHz channel separations.

then the frequencies (MHz) of individual channels are expressed by the following relationships:

a) for channel separation of 112 MHz:

$$\begin{array}{ll} \text{lower half of the band:} & f_n = f_r - 784 + 112n \\ \text{upper half of the band:} & f_n' = f_r + 28 + 112n \end{array} \quad \text{where } n = 1, 2, 3, \dots 6$$

b) for channel separation of 56 MHz:

$$\begin{array}{ll} \text{lower half of the band:} & f_n = f_r - 756 + 56n \\ \text{upper half of the band:} & f_n' = f_r + 56 + 56n \end{array} \quad \text{where } n = 1, 2, 3, \dots 12$$

c) for a channel separation of 28 MHz:

$$\begin{array}{ll} \text{lower half of the band:} & f_n = f_r - 798 + 28n \\ \text{upper half of the band:} & f_n' = f_r + 14 + 28n \end{array} \quad \text{where } n = 1, 2, 3, \dots 27$$

d) for a channel separation of 14 MHz:

$$\begin{array}{ll} \text{Lower half of the band:} & f_n = f_r - 791 + 14n \\ \text{Upper half of the band:} & f_n' = f_r + 21 + 14n \end{array} \quad \text{where } n = 1, 2, 3, \dots 54$$

e) for a channel separation of 7 MHz:

$$\begin{array}{ll} \text{Lower half of the band:} & f_n = f_r - 787.5 + 7n \\ \text{Upper half of the band:} & f_n' = f_r + 24.5 + 7n \end{array} \quad \text{where } n = 1, 2, 3, \dots 108$$

f) for a channel separation of 3.5 MHz:

$$\begin{array}{ll} \text{Lower half of the band:} & f_n = f_r - 785.75 + 3.5n \\ \text{upper half of the band:} & f_n' = f_r + 26.25 + 3.5n \end{array} \quad \text{where } n = 1, 2, 3, \dots 216$$

XS MHz	n	f_1 MHz	f_n MHz	f_1' MHz	f_n' MHz	ZS_1 MHz	ZS_2 MHz	YS MHz	DS MHz
112	1...6	31927	32487	32739	33299	127	101	252	812
56	1...12	31899	32515	32711	33327	99	73	196	812
28	1...27	31829	32557	32641	33369	29	31	84	812
14	1...54	31822	32564	32634	33376	22	24	70	812
7	1...108	31818.5	32567.5	32630.5	33379.5	18.5	20.5	63	812
3.5	1...216	31816.75	32569.25	32628.75	33381.25	16.75	18.75	59.5	812

Table 1: Calculated parameters according to ITU-R Rec. 746

XS Separation between centre frequencies of adjacent channels

YS Separation between centre frequencies of the closest go and return channels

ZS₁ Separation between the lower band edge and the centre frequency of the lowest channel in the lower half of the band

ZS₂ Separation between centre frequency of the highest channel in the upper half of the band and the upper band edge

DS Duplex spacing ($f_n' - f_n$)

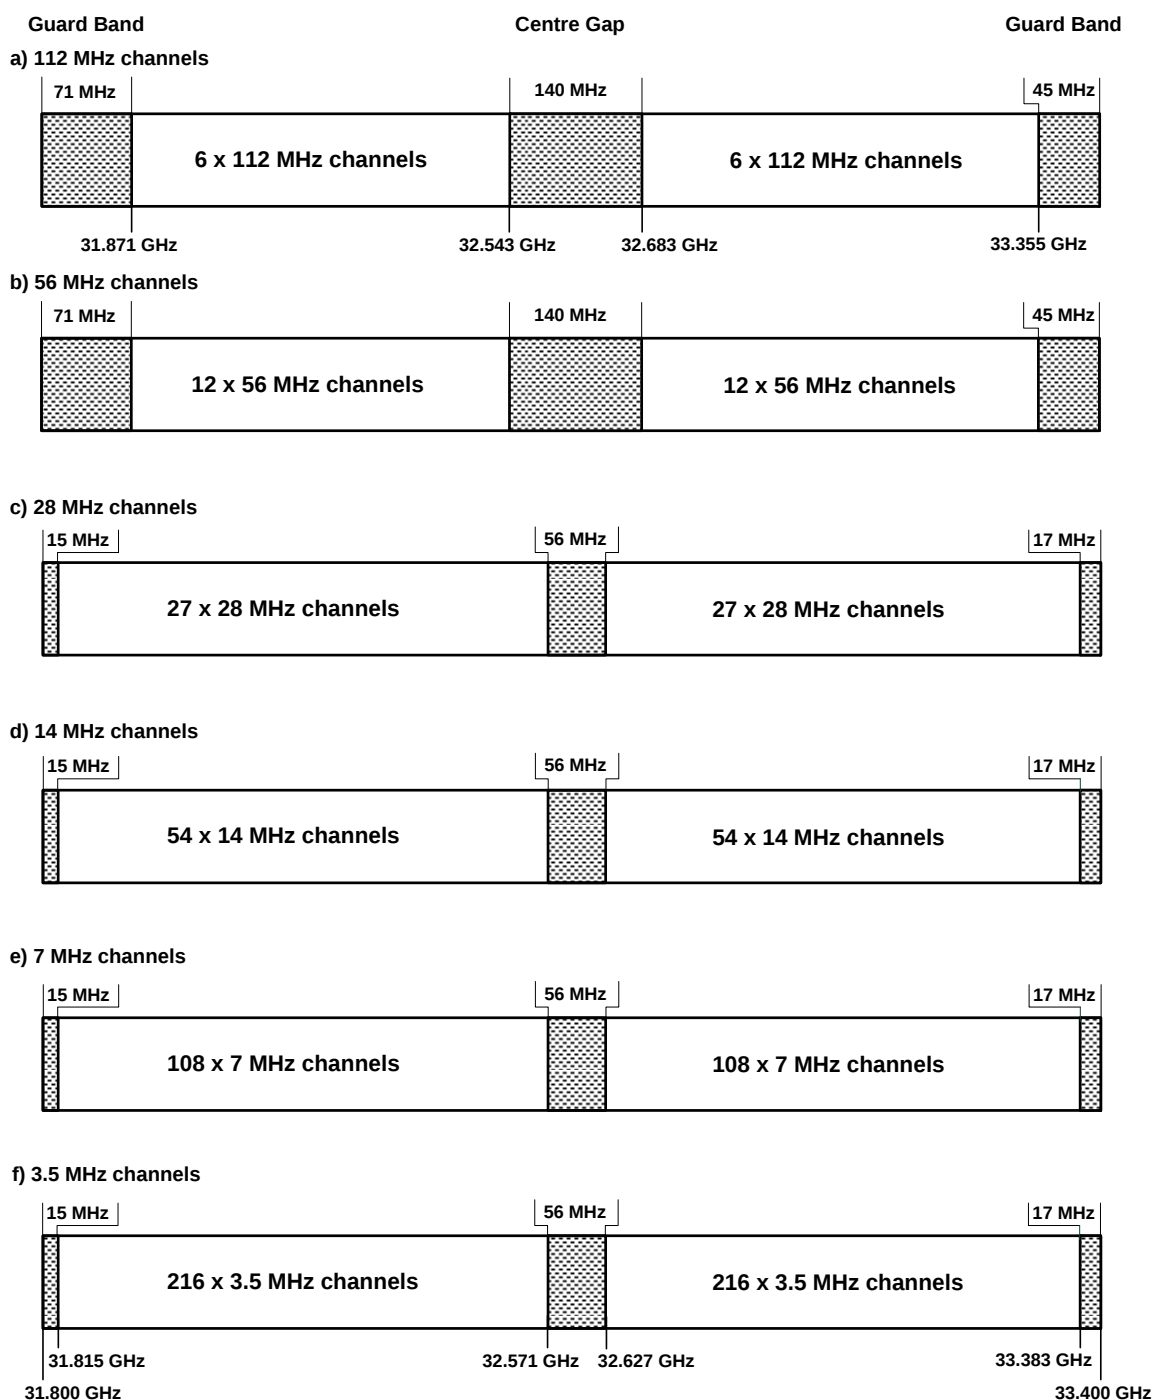


Figure 1: Occupied spectrum: 31.8 to 33.4 GHz Band