



European Radiocommunications Committee (ERC)
within the European Conference of Postal and Telecommunications Administrations (CEPT)

CEPT/ERC/RECOMMENDATION 74-01E (Siófok 98, Nice 99, Sesimbra 02, Hradec Kralove 05)

UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Recommendation approved by the Working Group "Spectrum Engineering" (WGSE)

Foreword

This Recommendation specifies the limits of the unwanted emissions in the spurious domain (spurious domain emission limits) for different services and types of equipment. It should be used as a generic guide when drafting new, and revising ETSI standards, and also for guidance to administrations in the absence of relevant standards. It should not be used as a stand-alone document for the purpose of type approval. The limits are set for generic families of Services and do not prevent that specific systems, for specific reasons, might require tighter limits reported in ETSI standards.

This Recommendation is to be used within a broader context of ITU-R recommendations, dealing with unwanted emissions that are summarised by the CEPT ECC Recommendation 02-05 "Unwanted emissions". In particular, those ITU-R documents contain information and guidance on the applicability and measurement of limits reported in this Recommendation.

It is recognised that certain existing ETSI standards and a limited number of those in an advanced stage of preparation might not fully align with this Recommendation. Where, for historical reasons, such existing standards do not align with this Recommendation, the spurious domain emission limits should be reviewed if revisions are considered. It is also recognised that, largely as a consequence of new technologies emerging, it may be acceptable that specific standards adopt limits which differ from this Recommendation.

Where a difference between the limits for a particular standard and this Recommendation might exist, the limits should be agreed following the iterative, consultative procedure given in the ETSI/ERC Memorandum of Understanding¹ (ref. ETSI Collective Letter no. 866 of 26 Jan. 94). This procedure should consider the interaction between technical parameters, spectrum efficiency, regulatory and economic aspects.

Where there is a difference between the limits for a particular standard and this recommendation CEPT assumes the following procedure would be useful:

- The relevant technical bodies in ETSI² and CEPT³ will agree to exchange liaison statements to each other whenever they believe changes to this recommendation or an ETSI standard, are required;
- The ETSI liaison statement should be supported by appropriate technical justification and other relevant information. This should include information on economic and market related issues concerning the proposal. In addition ETSI should also provide any information on system spectrum efficiency that they may have available to support their case;
- The CEPT liaison statement should include the implications of the proposal on spectrum engineering parameters such as: effective use of the spectrum, requirements of existing services, sharing/adjacent band and other regulatory issues;

¹ This is available from the ERO (many CEPT documents are available on the ERO web site <http://www.ero.dk>).

² Currently ETSI WG ERM-RM (or ETSI TC ERM).

³ Currently CEPT WG SE.

- The proposal should be considered in the spirit of the CEPT/ETSI MoU with dialogue, full consultation and an iterative process if necessary. Ideally this process should be completed within 6 months;

The conclusions should be mutually acceptable and neither party should feel that its views have been disregarded;

- When consensus is achieved the results should be recorded in a revision of this recommendation or revision of the appropriate standard.

It is considered appropriate that this Recommendation should be reviewed every three years, in the light of changing technologies and regulatory requirements. This review should involve consultation with the relevant technical and working groups within CEPT and ETSI.

“The European Conference of Postal and Telecommunications Administrations,

considering

- a) that the radio frequency spectrum is a common resource and it is necessary to keep it as un-polluted as possible, making the best use of the most modern and cost-effective techniques;
- b) that it is important for CEPT countries to define common limits of unwanted emissions in the spurious domain for all services that may be placed in operation ;
- c) that detailed and specific sharing or compatibility studies may lead to different limits and definitions for the unwanted emissions in the spurious domain from the systems concerned; however these are not in the scope of this recommendation which aims to provide a specific minimum requirement;
- d) that Recommendation ITU-R SM.329 provides options for different categories of limits for unwanted emissions in the spurious domain; moreover it provides some degree of freedom to Administrations, for definition of frequency boundaries of spurious domain and the detailed transition of the limits nearby the fundamental emission; in particular it allows, for digital modulations, different definition of spurious emissions frequency boundaries;
- e) that Recommendation ITU-R SM.1539 and Appendix 3 of the ITU Radio Regulations deal with variation of the boundary between the out-of-band and spurious domains, other than the specific $\pm 250\%$ of the Necessary Bandwidth from the centre frequency of the emission;
- f) that a revised Appendix 3 of the ITU Radio Regulations contains new spurious emissions limits, with the time scales for their implementation;
- g) that the Radioastronomy Service, the Earth Exploration Satellite Service and the Meteorological Satellite Service using passive sensors are particularly sensitive to interference due to their wide frequency coverage and the weakness of the signals they detect. Their protection limits are far lower than the spurious domain emission limits considered practicable at the antenna port of most transmitters, therefore the protection of these services depends on additional mitigating factors such as antenna decoupling and spatial separation. Threshold levels of interference detrimental to the radio astronomy service, Earth exploration-satellite and meteorological-satellite services using passive sensors can be found in Recommendations ITU-R RA.769 and SA.1029;
- h) that there may be cases where a permanent source of interference, for example a radar or broadcast transmitter in the near vicinity, or spurious emissions generated at the radio transmitter site due to the interaction amongst various transmitters operating at the same time, cause unacceptable performance degradation to a victim receiver. These cases are considered site engineering problems and are not in the scope of this recommendation provided that it is possible to use special protection applied to either the source of interference, or the victim, or both;
- i) that CEPT and ETSI have developed a Memorandum of Understanding describing the relative responsibilities of the two bodies. The MoU text is available from the ERO;

- j) that within CEPT/ECC, a statistical simulation methodology based on the 'Monte Carlo' method has been developed and accepted as the basis for the development of a software simulation tool SEAMCAT, which enables assessment of the effect of spurious domain emission limits in terms of probability of interference. The latest version of SEAMCAT tool is available from the ERO;
- k) that unwanted emissions may be delivered to the antenna port with consequent radiation from the antenna or produced by direct unwanted radiation from the system enclosure, due to insufficient shielding; however the latter effect is outside the scope of this recommendation;
- l) that fast switching transients of burst transmission systems may produce specific spurious emission patterns with high peak factor, which may affect victim receivers more severely than that due only to the spurious emissions associated with the average power during the burst duration;
- m) that transmission systems may be coupled to an "Active Antenna System" which may further contribute to generation of spurious emissions;

Note: an "Active Antenna System" (AAS) is an antenna with embedded capability for electronic amplification and/or other RF processing. The total gain of an AAS may be functionally split into an "active" gain of the electronic functions (AG) and a conventional "passive" gain/loss (directivity) due to the geometrical design performance of the antenna (PG).
- n) that receivers may also radiate spurious components from the antenna, which are presently not covered by ITU-R Recommendation SM.329;

recommends

- 1) that limits of unwanted emissions in the spurious domain apply at frequencies beyond the limit of 250% of the necessary bandwidth above and below the centre frequency of the emission. However, this frequency separation may be dependent on the type of modulation used, the maximum bit rate in the case of digital modulation, the type of transmitter, and frequency co-ordination factors. For example, where practical the \pm 250% of the relevant Channel Separation (CS) may be used.

Note 1: According to the Radio Regulations, the necessary bandwidth is, for a given class of emission, the width of the frequency band, which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions. However, the necessary bandwidths of most digital modulation formats are presently not referred to in ITU-R Recommendations of SM series.

Note 2: Considering the flexibility allowed by Recommendation ITU-R SM.329 on the 250% boundary definition, it is recognised that this figure may be appropriate for medium bandwidth systems, while the physical constraint of filtering in the narrow-band systems and the resulting amount of spectrum polluted by wide-band systems may require further adaptation (e.g. by a wider or a reduced percentage, respectively). Recommendation ITU-R SM.1539 and Appendix 3 of the ITU Radio Regulations give guidance on the boundary variation in these cases.

Note 3: In Article 1 of the ITU Radio Regulations (No. 1.146B) and in Recommendation ITU-R SM.329 the spurious domain (of an emission) is defined by the frequency range, beyond the out-of-band domain, in which spurious emissions generally dominate.

- 2) that for the purpose of this recommendation, only unwanted emissions in the spurious domain conducted to the antenna port or subsequently radiated by any integral antenna, are subject to the established limits;

- 3) that the spurious domain emission limits for radio equipment are considered here to be applicable for the range 9 kHz to 300 GHz. However, for practical measurement purposes only, the frequency range of spurious emissions may be restricted. As guidance for practical purposes, the following measurement parameters are normally recommended:

Fundamental frequency range	Frequency range for measurements	
	Lower frequency	Upper frequency (The test should include the entire harmonic band and not be truncated at the precise upper frequency limit stated)
9 kHz - 100 MHz	9 kHz	1 GHz
100 MHz - 300 MHz	9 kHz	10 th harmonic
300 MHz - 600 MHz	30 MHz	3 GHz
600 MHz - 5.2 GHz	30 MHz	5 th harmonic
5.2 GHz - 13 GHz	30 MHz	26 GHz
13 GHz - 150 GHz	30 MHz	2 nd harmonic
150 GHz - 300 GHz	30 MHz	300 GHz

Note 1: These parameters reflect the increasing difficulty in undertaking real tests, especially at frequencies approaching or beyond 110 GHz, taking into account such factors as availability and usability of suitable measurement equipment. In some circumstances, it may be necessary to extend the range of test frequencies in order to facilitate better protection of other services such as Radioastronomy. In any case, systems having an integral antenna incorporating a waveguide section, or with an antenna connection in such form, and of length equal to at least twice the cut-off wavelength, should not require spurious emissions measurement below 0.7 times the waveguide cut-off frequency;

Note 2: Further simplifications of measuring techniques to achieve time/cost savings, while still guaranteeing the fulfillment of the requirement, are outside the scope of this Recommendation, but may be taken from the relevant system EN or Conformance Test Standards when available.

- 4) that the following reference bandwidths should be used:
- 1 kHz between 9 and 150 kHz
 - 10 kHz between 150 kHz and 30 MHz
 - 100 kHz between 30 MHz and 1 GHz
 - 1 MHz above 1 GHz

Note 1: A reference bandwidth is a bandwidth in which the spurious domain emission level is specified.

Note 2: Some services may use, close to the carrier, reference bandwidth values different from the above; these differences are quoted in the relevant service Annex.

Note 3: As a special case, the reference bandwidth of all space stations' spurious domain emissions should be 4 kHz.

Note 4: The reference bandwidths for specifying spurious emissions in case of radar systems are provided in Appendix 3 of the Radio Regulations (see § 10). The bandwidths required for proper measurement of radar spurious domain emissions should be calculated for each particular radar system, and the measurement methods should be guided by the Recommendation ITU-R M.1177.

Note 5: As a general rule, the resolution bandwidth of the measuring receiver should be equal to the reference bandwidth as given in this recommend. To improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth can be different from the reference bandwidth. When the resolution bandwidth is smaller than the reference bandwidth, the result should be integrated over the reference bandwidth. When the resolution bandwidth is greater than the reference bandwidth, the result for broadband spurious emissions should be normalised to the bandwidth ratio. For discrete spurious emissions, normalisation is not applicable, while integration over the reference bandwidth is still applicable;

- 5) that the levels of spurious domain emissions should be defined within a reference bandwidth;
- 6) that the appropriate spurious domain emission limits should be applicable to all services as detailed by Table 1. Unless the Peak Envelope Power (PEP) is explicitly quoted, the spurious domain emission limits specified in this recommendation from the transmitter into the antenna port are in terms of mean power. The mean power (P) of any spurious domain transmission from a burst transmitter is the mean power averaged over the burst duration.

Note 1: In special cases, such as those referred in considering h), tighter limits may be required.

Note 2: It is recognised that, in principle, in some cases of narrowband and/or high power transmitters for all categories of services, there may be difficulties in meeting limits close to +/- 250% of the necessary bandwidth. These cases are reported in the service specific annexes, referred to in **Table 1**.

Note 3: When a system is coupled to an "Active Antenna System", the limits of **Table 1** should be met by the combined system; therefore compliance should be verified through an e.i.r.p. measurement (either near-field or far-field) and subsequent conversion to absolute power/attenuation values delivered to the transmission line, taking into account only the conventional "passive" gain (directivity) of the antenna.

- 7) that for the fast switching induced spurious domain emissions, an additional limit for their peak power will be necessary, however further study should be carried out to investigate the nature of the phenomenon prior to fixing specific limits;
- 8) that, the limits specified within this Recommendation should be considered for new ETSI standards developed after the date at which the Recommendation is adopted.

Note 1: In the case where the limits referred to in this Recommendation are found to be more stringent than existing ETSI Standards (TBR/ETS/EN/ES), a revision process may need to be considered. If revised, the standard should, whenever technically and economically feasible, meet the limits in this Recommendation.

Note 2: Where either CEPT or ETSI consider the limits defined in this Recommendation are inappropriate for a particular standard an agreement on alternative limits should be reached by application of the MoU between ETSI and CEPT.

- 9) that for all cases not covered in this recommendation, the Recommendation ITU-R SM.329 should apply; however, where applicable, ETSI standards or ITU-R Recommendations, if any, should be taken into account for methods of measurement of spurious emissions of specific services;
- 10) that Administrations should afford all practical protection to the frequency bands utilised by the services using passive sensors, referred to in considering g) (interference threshold values for these services are established by the relevant ITU-R recommendations). When bringing new services into operation, administrations are urged to note that transmitters can cause severe interference to other services through their spurious and out-of-band emissions, including remote side-bands;
- 11) that when measuring spurious emissions of receivers, no frequency range exclusion, such as the 250% of the necessary bandwidth limit, quoted in recommends 1 should apply. Measurements should be made in accordance with recommends 3, where the fundamental frequency range should include the highest oscillator frequency used in the receiver and the harmonics are those of the highest oscillator frequency.

- 12) that the active state of a transmission station is defined as the state which produces the authorised emission.
- 13) that the idle/standby state of a transmission station is defined as the state where the transmitter is available for traffic, but is not in the active state.

TABLE 1

SPURIOUS DOMAIN EMISSION LIMITS		
Type of service (Note 1)		Limits
Fixed Service		See Annex 1
Land Mobile Service (Note 2) and Maritime Mobile Service (VHF) (mobiles and base stations)		See Annex 2
Space Services		See Annex 3
Broadcasting		See Annex 4
Radar Systems in the Radiodetermination Service		See Annex 5
Amateur services		See Annex 6
Emergency position-indicating radio beacon, Emergency locator transmitter, Personal location beacon, Search and rescue transponder, Ship emergency, lifeboat, and survival craft transmitters; and Land, aeronautical or maritime transmitters when used in emergency.		No limit
All other services, except those quoted above:	Transmitters	Limits specified in Appendix 3 of the Radio Regulations apply
	Receivers and idle/standby transmitters	- 57 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ - 47 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11)

Note 1: In the relevant annexes referenced in this table, “analogue” and “digital” systems are referred to; for this purpose systems employing any modulation scheme that uses digital processing to quantise the carrier modulation are classified as “digital” systems.

Note 2: Annex 2 contains limits for land mobile systems (e.g. public cellular radio, professional mobile radio and radio local area networks) and also contains limits applicable to systems using similar technologies (e.g. Short Range Devices, CB (citizens band), cordless telephones, radio microphones).”

Note:

Please check the ERO web site (<http://www.ero.dk>) for the up to date position on the implementation of this and other ECC/ERC Recommendations.

Annex 1

FIXED SERVICE SPECIFIC REQUIREMENTS *(No change)*

1. Informative background

Fixed Service Digital Radio Systems presently referred to in the specific ETSI TM4 work programmes, and used in CEPT countries, cover a very wide range of frequency bands of emission, traffic capacity, channel separations and modulation formats of which typical parameters are as follows:

- frequency band from below 1 GHz to 58 GHz;
- traffic capacity from 9.6 kbit/s to 622 Mbit/s;
- channel separations from 25 kHz to 220 MHz;
- modulation formats from 2 to 1024 states (amplitude and/or phase and/or frequency states).

Analogue TV distribution systems are the main analogue Radio Relay Systems of practical interest still in operation. The necessary bandwidth of such analogue TV distribution systems is not defined in any ITU-R Recommendation and, moreover, a wide variety of above-video sub-carriers are usually added to the main TV carrier.

2. Limits

ITU-R Recommendation F.1191 requires that, for Digital Radio Systems, operating on a specific radio-frequency channel arrangement, the frequency boundaries between spurious and out-of-band domains are $\pm 250\%$ of the relevant Channel Separation (CS). Therefore, for the purpose of this recommendation, the frequency boundaries for spurious domain emissions of analogue and digital fixed service systems are taken, whenever applicable, as $\pm 250\%$ of the relevant CS of the radio-frequency channel arrangement where the system is to be placed.

According to ITU-R Recommendation F.1191, the Channel Separation (CS) is taken as $XS/2$ for alternated frequency channel arrangements and XS for co-channel and interleaved frequency channel arrangements as defined by ITU-R Recommendation F.746.

The table 1.1 below establishes the spurious domain emission limits for systems in the fixed service.

TABLE 1.1

SPURIOUS DOMAIN EMISSION LIMITS FOR SYSTEMS IN THE FIXED SERVICE	
Type of equipment	Limits mean power or, when applicable, average power during bursts duration in the reference bandwidth
Fixed Service - Transmitters (all stations except those below)	-50 dBm, for $9 \text{ kHz}^{(\text{note } 3)} \leq f \leq 21.2 \text{ GHz}^{(\text{note } 1)}$ -30 dBm, for $21.2 \text{ GHz} < f \leq F_{\text{UPP}}$ (see recommend 3) ^{(note 1) (note 4)}
Fixed Service - Terminal stations (remote stations with subscriber equipment interfaces) ^(note 2)	-40 dBm, for $9 \text{ kHz}^{(\text{note } 3)} \leq f \leq 21.2 \text{ GHz}^{(\text{note } 1)}$ -30 dBm, for $21.2 \text{ GHz} < f \leq F_{\text{UPP}}$ (see recommend 3) ^{(note 1) (note 4)}
Fixed Service – Receivers	The same limits as for the transmitters above apply
<p>Note 1: For digital systems it is necessary to provide one or more steps of reference bandwidth to produce suitable transition area for the spectral density to manage the required limit because in some frequency bands and/or applications narrow-band RF filters are not technically or economically feasible. Consequently, just outside the $\pm 250\%$ of the relevant Channel Separation, the limit of spurious domain emissions are defined with reference bandwidths as detailed by the specific Figure 1.1 and the related Table 1.2;</p> <p>Note 2: Point-to-Multipoint systems used in CEPT countries foresee three kind of stations: -MS Master (Central) Station (clearly identifiable in SM.329) -TS Terminal Station (also clearly identifiable in SM.329) -RS Repeater Station (which is not referred in SM.329); Repeater Stations of Point-to-multipoint systems will be considered as Terminal stations when they are intended for use only in Remote stations not co-located with any other Fixed radio equipment classified as Central station. When considering Multipoint-to-Multipoint (mesh) access systems, Multipoint-to-Multipoint stations providing co-frequency coverage to a defined area, without addressing any specific Terminal Station (in terms of antenna radiation pattern), should be considered as Master Station.</p> <p>Note 3: In ITU-R Recommendation SM.329 from 9 kHz to 30 MHz only Category A limits (i.e. -13 dBm) apply also when Category B is selected, however CEPT will propose revision to SM.329 in order to extend Category B limits down to 9 kHz.</p> <p>Note 4: It is recognised that, for Multipoint systems, with fundamental operating frequency higher than 21.2 GHz, ETSI EN 301 390 identifies that the limits, reported in this CEPT Recommendation, developed at earlier stage, are not enough stringent in the HDFS bands (21.2 GHz to 43.5 GHz) in order to safely deploy the large foreseen number of systems. Therefore, in developing the Harmonised Standards under 1999/05/EC Directive (R&TTE Directive) for Multipoint systems, the more stringent limits, reported in ETSI EN 301 390 for those bands, have been adopted among essential requirements under article 3.2 of the R&TTE Directive.</p>	

In extreme cases, typically above 26 GHz and mostly due to the use of external mixers in the test set-up, it still may not be possible to achieve enough sensitivity to verify that the Equipment Under Test (EUT) conforms to the specification requirement under modulated condition. In these cases, the measurement may be carried out in un-modulated (CW) conditions. The spurious domain in the CW condition may be corrected for those emissions that are subject to the modulation process, by an amount equal to the modulation loss of the EUT (i.e. the difference in dB between the power output and the power measured in the reference bandwidth at centre frequency of the carrier).

Table 1.2

VALUES OF Fa, Fb, Fc AND Fd in Fig. 1.1.						
Fundamental Emission Frequency	Channel Separation (CS) (MHz)	Typical Symbol Frequency (~Mbit/s)	Ref. BW 0.3 kHz	Ref. BW 1 kHz	Ref. BW 10 kHz	Ref. BW 100 kHz
			Fa* (MHz)	Fb* (MHz)	Fc* (MHz)	Fd* (MHz)
Below 21.2 GHz (Terminal stations)	$0.01 \leq CS < 1$	$F_s \approx 0.006-0.8$	-	-	14	70
	$1 \leq CS < 10$	$F_s \approx 0.6-8$	-	-	28	70
	$CS \geq 10$	$F_s \sim > 6$	-	-	49 (**)	70 (**)
Below 21.2 GHz (Other stations)	$0.01 \leq CS < 1$	$F_s \approx 0.006-0.8$	3.5	7	14	70
	$1 \leq CS < 10$	$F_s \approx 0.6-8$	-	14 (**)	28	70
	$CS \geq 10$	$F_s \sim > 6$	-	-	49 (**)	70 (**)
Above 21.2 GHz (All stations)	$1 \leq CS < 10$	$F_s \approx 0.6-8$	-	-	-	70
	$CS \geq 10$	$F_s > \sim 6$	-	-	-	-

(*) : The frequency limits are defined with respect to the centre frequency of the emissions. For measurement purposes, the reference bandwidth given in **Table 1.2** apply to the frequency range extending from the $\pm 250\%$ CS points to the first frequency limit indicated, from Fa to Fb, from Fb to Fc, or from Fc to Fd as appropriate.

(**): Not applicable for CS where the 250% point exceeds these values.

Note: It is recognised that, depending on the characteristic of the domains, the actual power density relative to the ETSI mask at the $\pm 250\%$ boundary, when evaluated in the reference bandwidth of one or more steps of Table 1.1, may be lower than the spurious domain emission limit itself. In such cases these steps are not applicable and the first applicable spurious domain emission reference bandwidth step, which corresponds to a power density equal or lower than that evaluated with the ETSI mask in the same reference bandwidth should be extended back to the $\pm 250\%$ boundary (examples of this concept are shown in Figure 1.2.)

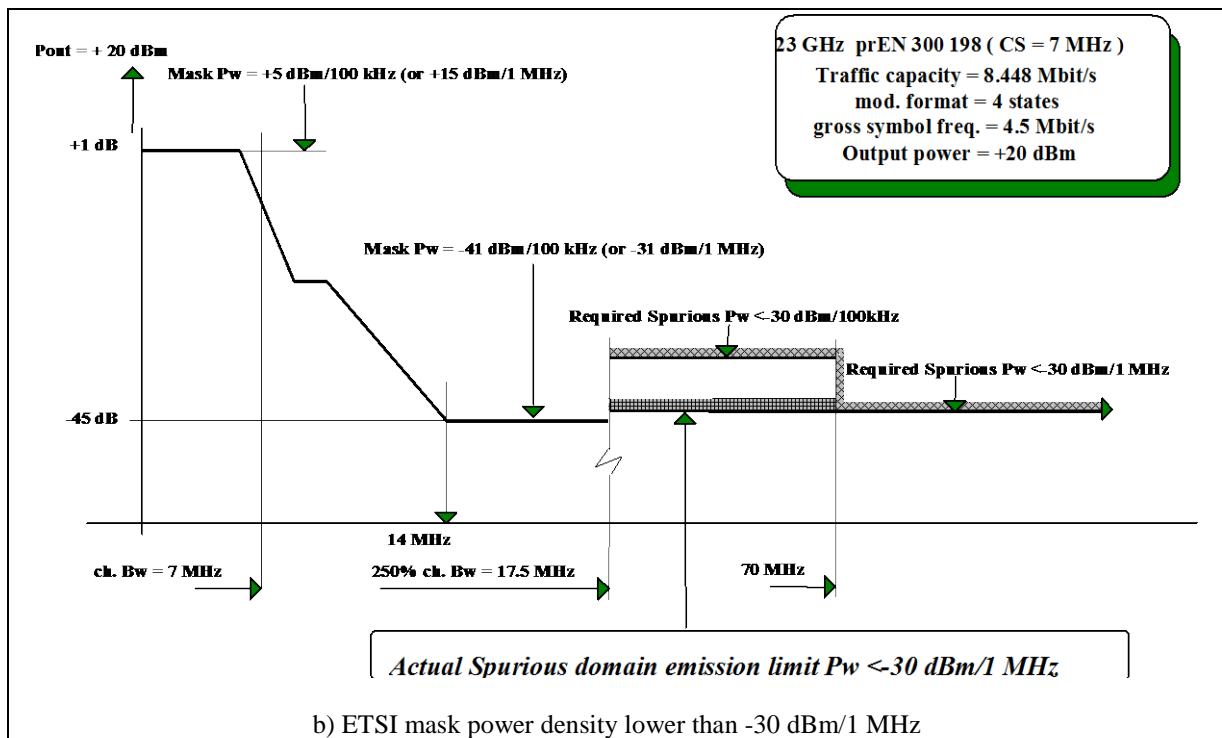
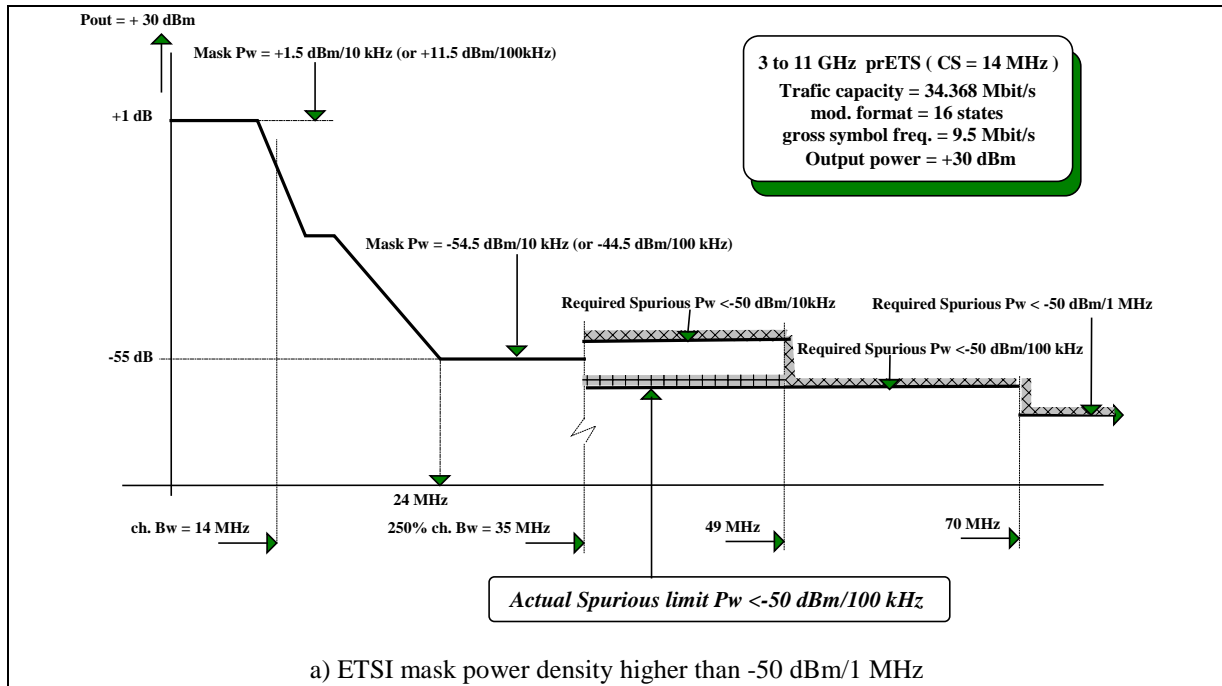


Figure 1.2: Examples of ETSI mask being more stringent than the spurious domain emission limits in the reference bandwidth (ref. to Note to Table 1.2)

Annex 2

LAND MOBILE SERVICE AND MARITIME MOBILE SERVICE (VHF)
SPECIFIC REQUIREMENTS (No change)

1 Limits

TABLE 2.1

SPURIOUS DOMAIN EMISSION LIMITS FOR THE LAND MOBILE SERVICE AND MARITIME MOBILE SERVICE (VHF)	
Type of equipment	Limits mean power or, when applicable, average power during bursts duration in the reference bandwidth
Terminals and Base Stations (in transmit mode), except the equipment specified below	-36 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ -30 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3)
Short range devices, CB, Cordless Telephones, Radio Microphones (all systems in transmit mode)	-54 dBm, for f within the bands : 47–74 MHz, 87.5–118 MHz, 174–230 MHz, 470–862 MHz -36 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ (except above frequency bands) -30 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3)
Short range inductive devices operating below 30 MHz (in transmit mode)	27 dB μ A/m, for (at 9 kHz then decaying by 10 dB/decade) (Note 1) $9 \text{ kHz} \leq f \leq 10 \text{ MHz}$ -3.5 dB μ A/m, for $10 \text{ MHz} < f \leq 30 \text{ MHz}$ (Note 1) -54 dBm, for f within the bands : 47–74 MHz, 87.5–118 MHz, 174–230 MHz, 470–862 MHz -36 dBm, for $30 \text{ MHz} < f \leq 1 \text{ GHz}$ (except above frequency bands) -30 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3)
Receivers and idle/standby transmitters	- 57 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ - 47 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11)
Short range inductive receivers and idle/standby transmitters operating below 30 MHz	5.5 dB μ A/m, descending 3 dB/octave, for $9 \text{ kHz} \leq f < 4.78 \text{ MHz}$ -22 dB μ A/m, for $4.78 \text{ MHz} \leq f < 30 \text{ MHz}$ -57 dBm, for $30 \text{ MHz} \leq f < 1 \text{ GHz}$
<p>Notes : - f is the frequency of the spurious domain emission - for systems that use digital modulation and narrow-band high power (≥ 1 Watt) analogue modulated systems, the reference bandwidth is specified in section 2 of this annex, while for any other analogue modulation the reference bandwidth specified in recommend 4 is applicable,</p> <p>Note 1: Levels are H-field limit at 10 m distance, measured by shielded loop antenna as specified by CISPR.</p>	

2 Application of reference bandwidths to digitally modulated and narrow-band high power analogue modulated mobile services

Narrow-band analogue modulated systems, with output power higher than 1 Watt and operated above 30 MHz, and digitally modulated systems although generally providing good spectrum efficiency, are unable to comply with the above limits for close-in frequencies due to the wideband noise generated by such systems. It is therefore necessary to provide specific steps of reference bandwidth in order to produce suitable transition area for the spectral density.

The specific reference bandwidth mask is shown in **Figure 2.1** for frequencies below 1 GHz and in **Figure 2.2** for frequencies above 1 GHz, with frequency limits which are a function of the channel separation or the necessary bandwidth (NB).

These masks apply to both mobile terminals and base stations.

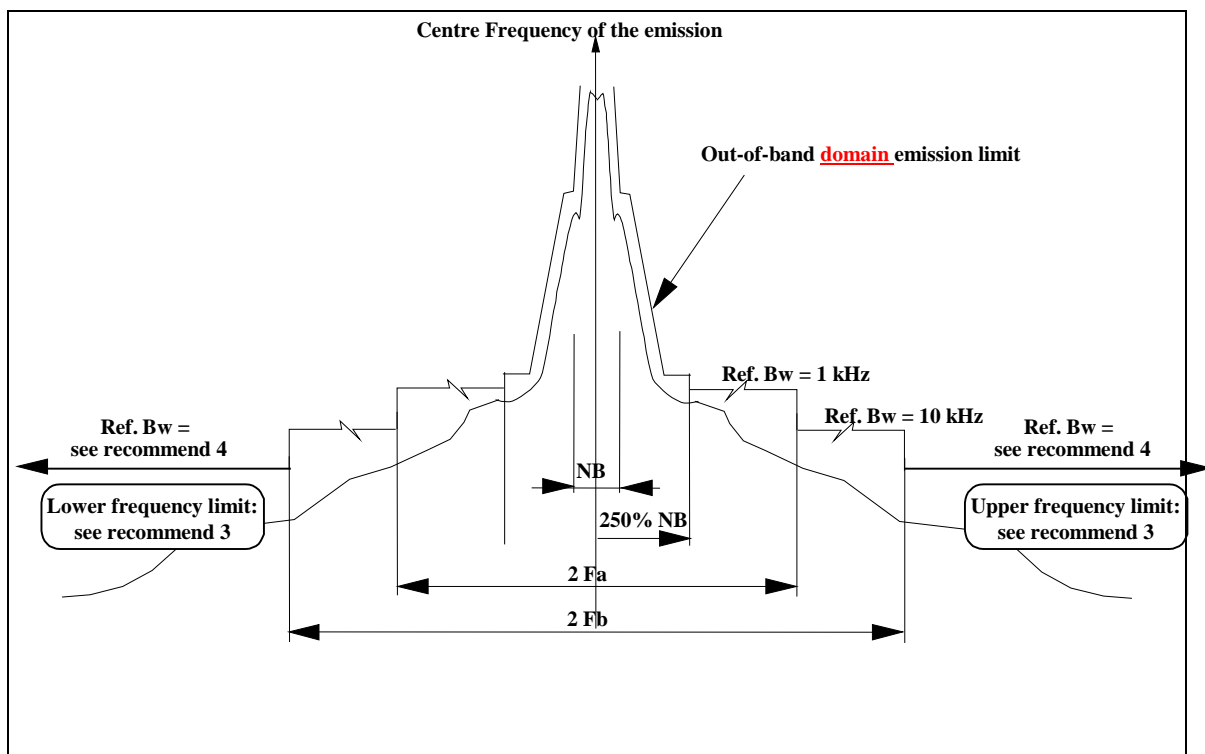


Figure 2.1: Specific mask for spurious domain emissions for mobile services operating between 30 MHz-1 GHz (see Table 2.2)

F_a^*	100 kHz or 4 times NB, whichever is the greater
F_b^*	500 kHz or 10 times NB, whichever is the greater

Table 2.2: Frequency references for Figure 2.1

(*): The frequency limits are defined from the centre frequency of the emission. For measurement purposes, the reference bandwidths given in **Table 2.2** apply to the frequency range extending from the 250% CS point to the first frequency limit indicated, or from F_a to F_b as appropriate.

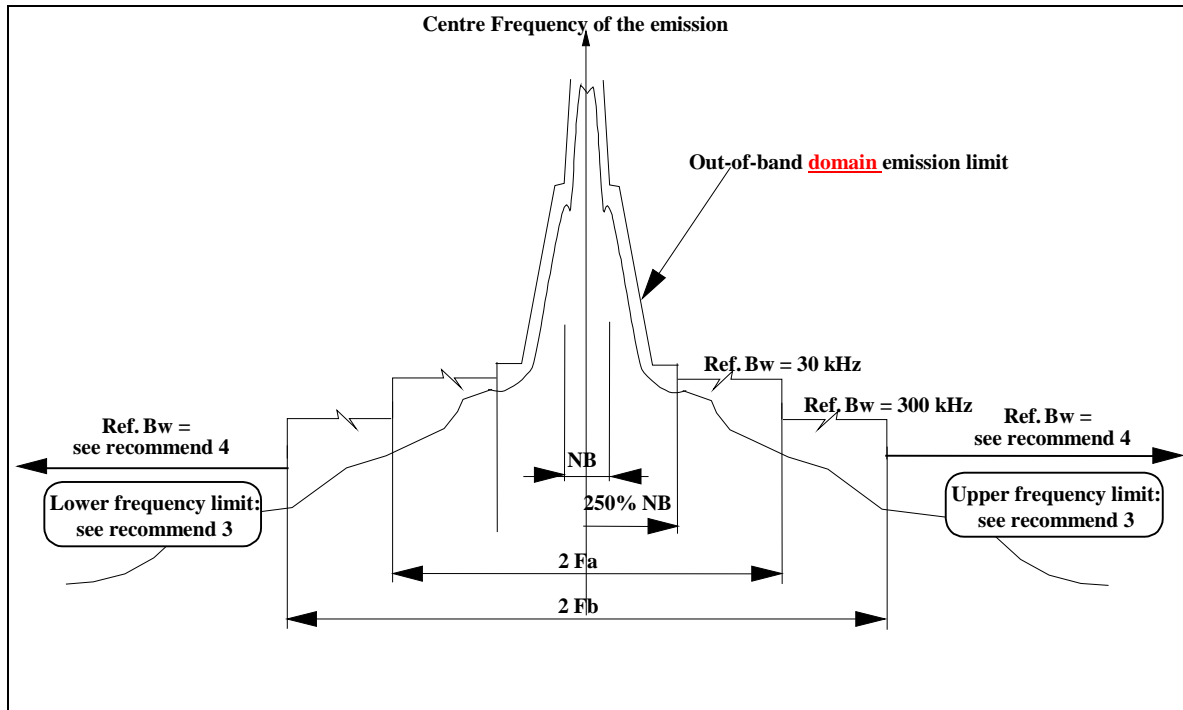


Figure 2.2: Specific mask for spurious domain emissions for mobile services operating above 1 GHz
(see Table 2.3)

F_a^*	500 kHz or 10 times NB, whichever is the greater
F_b^*	1 MHz or 12 times NB, whichever is the greater

Table 2.3: Frequency references for Figure 2.2

(*): The frequency limits are defined from the centre frequency of the emission. For measurement purposes, the reference bandwidths given in **Table 2.3** apply to the frequency range extending from the 250% CS point to the first frequency limit indicated, or from F_a to F_b as appropriate.

Annex 3

SPACE SERVICE SPECIFIC REQUIREMENTS

TABLE 3.1

SPURIOUS DOMAIN EMISSION LIMITS FOR SPACE SERVICES	
Type of equipment	Limits mean power or, when applicable, average power during burst duration in the reference bandwidth
VSAT (Very Small Aperture Terminal) and related terminals (see note 4), SNG (Satellite News Gathering) or transportable fixed Earth Stations each transmitting in the Fixed Satellite Service (FSS) above 3 GHz	EN55022 Class B limits, for $f \leq 1$ GHz 49 dBpW/100 kHz, for $1 \text{ GHz} < f \leq 3.4 \text{ GHz}$ 55 dBpW/100 kHz, for $3.4 \text{ GHz} < f \leq 10.7 \text{ GHz}$ 61 dBpW/100 kHz, for $10.7 \text{ GHz} < f \leq 21.2 \text{ GHz}$ 67 dBpW/100 kHz, for $21.2 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3) (Values are in EIRP, see notes 1, 2, 2bis, 2ter and 3)
VSAT and related terminals (see note 4), SNG or transportable fixed Earth Stations each operating in the FSS above 3 GHz: transmitters in the transmission disabled state or receive only VSAT	EN55022 Class B limits, for $f \leq 1$ GHz 48 dBpW/100 kHz, for $1 \text{ GHz} < f \leq 10.7 \text{ GHz}$ 54 dBpW/100 kHz, for $10.7 \text{ GHz} < f \leq 21.2 \text{ GHz}$ 60 dBpW/100 kHz, for $21.2 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11) (Values are in EIRP, see note 1)
Mobile Earth Stations (MES) (see Note 4bis) each transmitting below 1 GHz	-36 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ -30 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3) The mask in Figure 2.1 and Table 2.2 applies. In order to evaluate the 250% boundary as well as Fa and Fb, the minimum necessary bandwidth shall be considered as 30 kHz for all emissions.
Mobile Earth Stations (MES) (see Note 4bis) transmitting in the Mobile Satellite Service between 1 GHz and 3 GHz	Appropriate limits for these categories of terminals are defined in the applicable ETSI standards or equivalent. For cases not covered by such standards, the limits for generic terrestrial land mobile systems apply : -36 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ -30 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3) The frequency offsets at which these limits apply are to be determined in appropriate standards.
Mobile Earth Stations (MES) (see Note 4bis) operating below 3 GHz: receivers, receive only MES and transmitters in the carrier-off state	- 57 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ - 47 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11)
LMES (Land Mobile Earth Stations) or MMES (Maritime Mobile Earth Stations) each transmitting in the MSS above 3 GHz	EN55022 Class B limits, for $f \leq 1$ GHz 49 dBpW/100 kHz, for $1 \text{ GHz} < f \leq 3.4 \text{ GHz}$ 55 dBpW/100 kHz, for $3.4 \text{ GHz} < f \leq 10.7 \text{ GHz}$ 61 dBpW/100 kHz, for $10.7 \text{ GHz} < f \leq 21.2 \text{ GHz}$ 67 dBpW/100 kHz, for $21.2 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 3) (Values are in EIRP, see note 1bis)
LMES (Land Mobile Earth Stations) or MMES (Maritime Mobile Earth Stations) each operating in the MSS above 3 GHz: transmitters in the carrier-off state	EN55022 Class B limits, for $f \leq 1$ GHz 48 dBpW/100 kHz, for $1 \text{ GHz} < f \leq 10.7 \text{ GHz}$ 54 dBpW/100 kHz, for $10.7 \text{ GHz} < f \leq 21.2 \text{ GHz}$ 60 dBpW/100 kHz, for $21.2 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11) (Values are in EIRP, see note 1bis)
Other Fixed Earth Stations	Relative attenuation limits in Appendix 3 of the Radio Regulations apply.

<p>Space stations (excluding Amateur Satellite Services which are covered under Annex 6), other Maritime Mobile Earth Stations and Aeronautical Mobile Earth Stations that are not covered by any of the above categories</p>	<p>Relative attenuation Limits reported in Appendix 3 of the Radio Regulations apply.</p>
<p>Note 1: As a special case, the limits for VSAT, SNG or transportable fixed Earth Stations are expressed in terms of EIRP for off-axis angles greater than 7°.</p> <p>Note 1bis: These EIRP limits for LMES and MMES apply in any direction.</p> <p>Note 2: In the frequency band of operation +/- 150 MHz, an EIRP limit of 78 dBpW/100 kHz applies. This limit may be exceeded in a frequency band which shall not exceed 80 MHz, centred on the carrier frequency, provided that the on-axis EIRP density at the considered frequency is 50 dB below the maximum on-axis EIRP density of the signal expressed in dBW/100 kHz. The frequency band of operation is the set of contiguous transmit frequency bands allocated to the FSS of the concerned region, or a continuous part of it, within which the equipment is designed to transmit, for use in accordance with the Radio Regulations.</p> <p>Note 2bis: As an exception to note 2, an EIRP limit of 95 dBpW/10 MHz applies in the frequency bands 5700-5850 MHz, 6650-6800 MHz for VSAT transmitting within the frequency band 5850 to 6650 MHz, and in the frequency bands 13.75-14.00 GHz and 14.25-14.75 GHz for VSAT transmitting within the frequency band 14.00-14.5 GHz. This limit may be exceeded in a frequency band which shall not exceed 50 MHz, centred on the carrier frequency, provided that the on-axis EIRP density at the considered frequency is 50 dB below the maximum on-axis EIRP density of the signal (within the necessary bandwidth) expressed in dBW/100 kHz. No EIRP limit is set in the frequency band 14.00-14.25 GHz.</p> <p>Note 2ter: As an exception to note 2, an EIRP limit of 85 dBpW/1 MHz applies in the frequency bands 29.35 GHz to 29.50 GHz and 30.00 GHz to 30.15 GHz for Satellite Terminal (ST) transmitting within the frequency band 29.5-30 GHz, and in the frequency bands 27.35 GHz to 29.50 GHz and 30.00 GHz to 30.15 GHz for ST transmitting within the frequency band 27.5-29.5 GHz. This limit may be exceeded in a frequency band which shall not exceed 50 MHz, centred on the carrier frequency, provided that the on-axis EIRP density measured in 100 kHz at the frequency of the considered spurious is 50 dB below the maximum on-axis EIRP density of the signal measured in 100 kHz. This limit may not apply in frequency bands exclusively designated to FSS in regions where those bands have been adopted. For STs operating in these bands, no EIRP limit is set in the frequency band 29.50 GHz to 30.00 GHz.</p> <p>Note 3: In the second harmonic of the frequency band of operation +/- 400 MHz, for any 20 MHz band within which one or more spurious signals exceeding the above limit are present, then the power of each of those spurious signals exceeding the limit shall be added in watts, and the sum shall not exceed 78 dBpW.</p> <p>Note 4: For the purpose of this Recommendation, the following satellite earth stations fall within the category of VSAT:</p> <ul style="list-style-type: none"> • Satellite terminals (STs) including both satellite user terminals (SUT) and satellite interactive terminals (SIT) transmitting in the frequency bands 27.50 to 29.50 GHz and 29.50 to 30.00 GHz, as defined in relevant ETSI standards; • Aeronautical earth stations (AES) transmitting in the frequency bands 14.00 to 14.50 GHz as defined in relevant ETSI standards; • Earth Stations on board Vessels (ESV) transmitting in the frequency bands within the ranges 5850 to 6650 MHz and 14.00 to 14.50 GHz as defined in relevant ETSI standards. <p>Note 4bis: For the purpose of this Recommendation the category of Mobile Earth Station (MES) includes handheld, portable, transportable, vehicle-mounted, host connected, semi-fixed or fixed equipment.</p>	


Annex 4

BROADCASTING SERVICE SPECIFIC REQUIREMENTS (No change)

TABLE 4.1

SPURIOUS DOMAIN EMISSION LIMITS FOR THE BROADCASTING SERVICE											
Type of equipment	Limits										
	Mean power absolute levels (dBm) or attenuation (dBc) below the power ^(note 1) supplied to the antenna port in the reference bandwidth										
Broadcasting transmitters below 30 MHz	Limits of Radio Regulations Appendix 3 apply: 50 dBc, without exceeding the absolute mean power of 17 dBm										
All types of broadcasting transmitters above 30 MHz	For frequencies $9\text{kHz} \leq f \leq F_{\text{UPPER}}$ (see recommend 3): <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 20px;">-36 dBm, for</td> <td>$P \leq 9 \text{ dBW}$</td> </tr> <tr> <td style="padding-right: 20px;">75 dBc, for</td> <td>$9 \text{ dBW} < P \leq 29 \text{ dBW}$</td> </tr> <tr> <td style="padding-right: 20px;">-16 dBm, for</td> <td>$29 \text{ dBW} < P \leq 39 \text{ dBW}$</td> </tr> <tr> <td style="padding-right: 20px;">85 dBc, for</td> <td>$39 \text{ dBW} < P \leq 50 \text{ dBW}$</td> </tr> <tr> <td style="padding-right: 20px;">-5 dBm, for</td> <td>$50 \text{ dBW} < P$</td> </tr> </table>	-36 dBm, for	$P \leq 9 \text{ dBW}$	75 dBc, for	$9 \text{ dBW} < P \leq 29 \text{ dBW}$	-16 dBm, for	$29 \text{ dBW} < P \leq 39 \text{ dBW}$	85 dBc, for	$39 \text{ dBW} < P \leq 50 \text{ dBW}$	-5 dBm, for	$50 \text{ dBW} < P$
-36 dBm, for	$P \leq 9 \text{ dBW}$										
75 dBc, for	$9 \text{ dBW} < P \leq 29 \text{ dBW}$										
-16 dBm, for	$29 \text{ dBW} < P \leq 39 \text{ dBW}$										
85 dBc, for	$39 \text{ dBW} < P \leq 50 \text{ dBW}$										
-5 dBm, for	$50 \text{ dBW} < P$										
Broadcasting receivers	Limits of EN55013 apply										
<p>Note 1: Mean power (P), in accordance with RR 1.158, at antenna port in watts. For analogue television, the mean power level is defined with a specified video signal modulation. This video signal has to be chosen in such a way that the maximum mean power level (e.g. video signal blanking level for NTSC and PAL and maximum video level “white” for SECAM) is provided by the equipment.</p>											

Figure 5.1: Overview of Services in the Radiodetermination Service

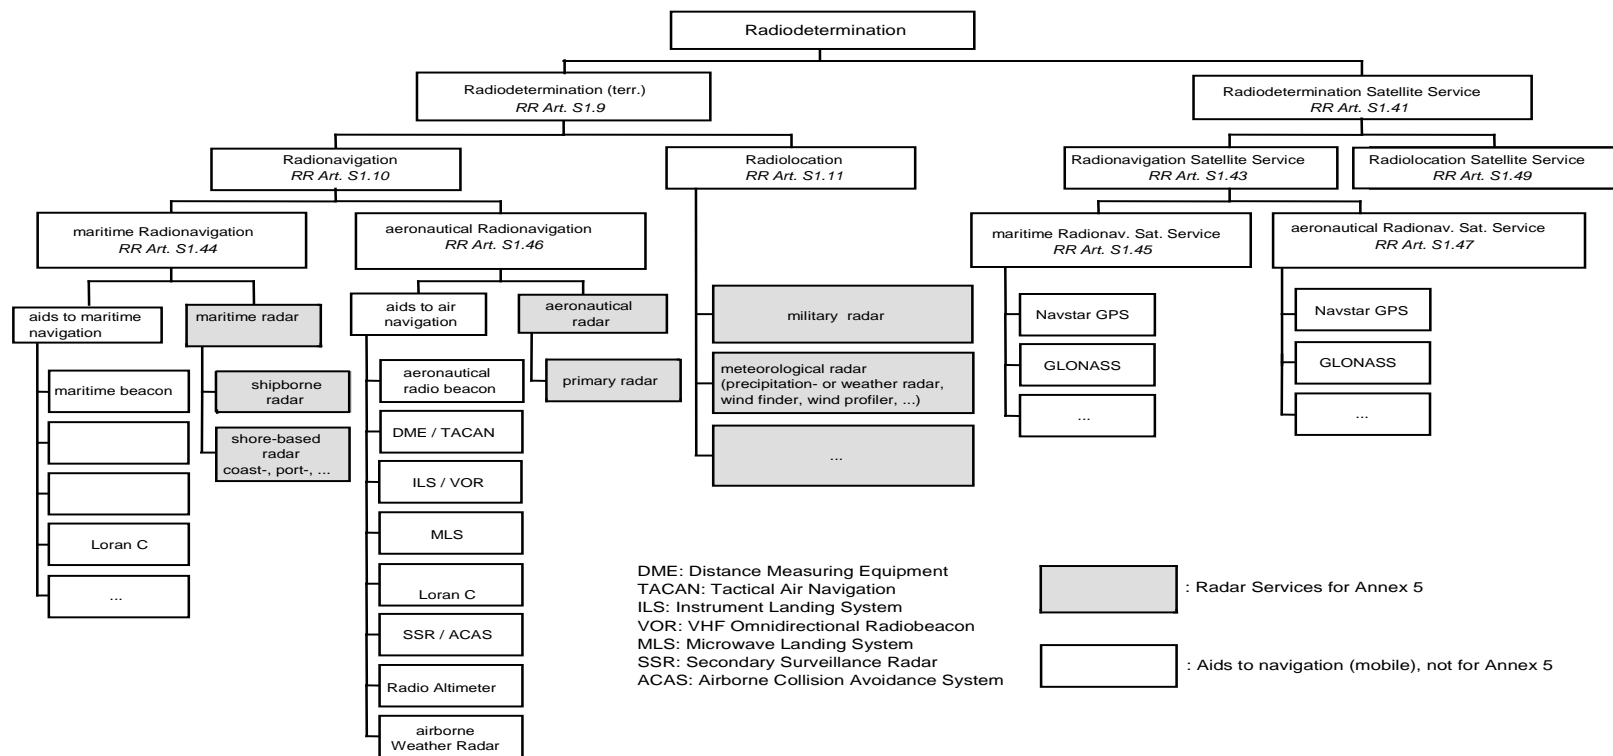

Annex 6

**SPECIFIC REQUIREMENTS FOR AMATEUR SERVICES
(INCLUDING AMATEUR SATELLITE SERVICE) (No change)**

Table 6.1

SPURIOUS DOMAIN EMISSION LIMITS FOR AMATEUR SERVICE	
Type of equipment	Limits
	Attenuation (dB) below the power supplied to the antenna port
Amateur equipment operating below 30 MHz (including SSB) (Note 1)	The following limit for PEP level in the reference bandwidth will be applicable: 43 + 10·log(PEP), or 50 dB, whichever is less stringent. The minimum necessary bandwidth used to evaluate the 250% boundary shall be considered as 4 kHz for all emissions.
SSB from mobile stations (Note 1)	PEP attenuation in the reference bandwidth: 43 dB below PEP. The minimum necessary bandwidth used to evaluate the 250% boundary shall be considered as 4 kHz for all emissions.
All equipment in the band 30 MHz to 1 GHz :	Limit for level in the reference bandwidth: 43 + 10·log(P), or 70 dBc, whichever is less stringent. The minimum necessary bandwidth used to evaluate the 250% boundary shall be considered as 25 kHz for all emissions.
All equipment between 1 GHz and 26 GHz	Limit for level in the reference bandwidth: 43 + 10·log(P), or 70 dBc, whichever is less stringent. The minimum necessary bandwidth used to evaluate the 250% boundary shall be considered as 100 kHz for all emissions.
All equipment above 26 GHz	Limit for level in the reference bandwidth: 43 + 10 log(P), or 70 dBc, whichever is less stringent. The minimum necessary bandwidth used to evaluate the 250% boundary shall be considered as 1 MHz for all emissions.
Space based Amateur satellite stations	Relative attenuation limits specified in Appendix 3 of Radio Regulations apply.
Receivers and idle/standby transmitters	- 57 dBm, for $9 \text{ kHz} \leq f \leq 1 \text{ GHz}$ - 47 dBm, for $1 \text{ GHz} < f \leq F_{\text{UPPER}}$ (see recommend 11)

Definitions used:

- PEP - peak envelope power in watts at the antenna port, in accordance with RR 1.157.

- P - mean power in watts at the antenna port, in accordance with RR 1.158. When burst transmission is used, the mean power P and the mean power of any spurious emissions are measured using power averaging over the burst duration.

- dBc - decibels relative to the unmodulated carrier power of the emission. In the cases, which do not have a carrier, for example in some digital modulation schemes where the carrier is not accessible for measurement, the reference level equivalent to dBc is decibels relative to the mean power P.

Note 1: All classes of emission using Single Side Band (SSB) are included in the category "SSB".